



testo




testo 317-1 Flue gas spillage detector

Instruction manual

Introduction

The electronic detector gives off an audible and visible alarm when heating flue gases are detected.

Technical data	
Response time: <2 s	Dimensions: 128 x 46 x 18 mm (Instr.)
Alarm display: Visible and audible	Length of probe: 247 mm
Storage/transport temperature: -20 to +50 °C	Power supply: 3 x 1.5 V micro AAA
Operating temp.: +4 to +45 °C	Warranty: 2 years

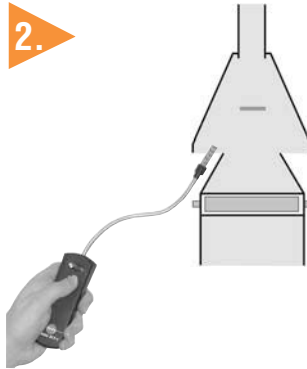

User-friendly operation

1. Function Test: Keep "DETECT" button pressed and touch sensor: alarm sounds
2. Start search for flue gas by keeping the "DETECT" button pressed
3. Acoustic and visible alarm when escaping flue gases are recognised
4. Release "DETECT" button: Instrument switches off



According to the conformity certificate, **testo 317-1** instruments fulfill 89/336/EWG guidelines.