

Mini thermometer

Mini alarm thermometer

Settable min./max. alarm

Permanently attached probe

With a clip for standing up, wall installation or for attachment to clothing






Illustration 1:1

The affordable testo mini thermometer with alarm function is small and handy, but big on performance. The penetration probe has an 80 cm wire and is permanently fixed to the instrument. The probe and the wire can be easily and compactly stored in the instrument.

If individually settable limit values are violated, an audible signal is sounded. The minimum penetration depth of the probe tip should be 20 mm. The alarm thermometer is suitable for the recording of temperature in the air, in soft, powdery substances and in liquids. It is not suitable for use in ovens or fermentation cabinets.



Technical data / Accessories

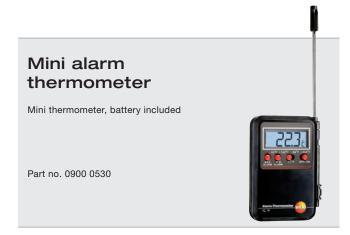

Sensor type

| Meas. range | -50 to +150 °C |
|----------------------|---|
| Accuracy ±1 digit | ±1 °C (-10 to +100 °C) ±2 °C (remaining range) |
| Resolution | 0.1 °C (-19.9 to +150 °C) 1 °C (-50 to -20 °C) |

General technical data

| Operating temperature | 0 to +50 °C |
|-----------------------|-----------------------|
| Storage temperature | -20 to +70 °C |
| Battery type | 2 AAA micro batteries |
| Battery life | 100 h |
| Display | LCD, 1 line |
| Housing material | ABS |
| Warranty | 2 years |

| Accessories | Part no. | | |
|--|-----------|--|--|
| Accessories for measuring instrument | | | |
| ISO calibration certificate/temperature; for air/immersion probes, calibration point -18°C | 0520 0061 | | |
| ISO calibration certificate/temperature; for air/immersion probes, calibration point 0°C | 0520 0062 | | |