

## Rotary Evaporator HS-2005S-N(CE)

- Dimension(W×D×H) : 730×410×630mm
- Power source : AC 220V 50/60Hz 2,5A
- Weight : 19,5kg
- Distinguished Features
  - 6 different types of flasks are attachable (from 50ml to 3000ml)
  - Digital speed control
  - Digital R.P.M Display / Speed control range : 20~280 R.P.M
  - Slant type condenser
  - Digital interior temperature measure and display  
(It catches the temperature changes caused by the interior pressure drops)
  - Motorized UP- DOWN control switch
  - Easy to utilize standard distillation solution


### Included Water bath HS-3001(PTFE coating)

- Heater : 1000W / Bath Material : SUS304 / Weight : 2,8kg
- Bath Dimension( $\phi$ ×H)mm : 245×120(Capacity:4,3ℓ)
- Required Power Source : AC 220V 50/60Hz 3,5A
- Distinguished Features
  - If the amount of water goes down under the certain threshold in the heating bath, the system automatically turns off its power for the safety purpose
  - Temp.Control range : Amb.~180℃
  - Temp.Setting/Display : Digital control(controlled by the main controller)
- ※ Double jacketed bath body (Safe to touch)

Utility model & Design patent registered



Operating panel

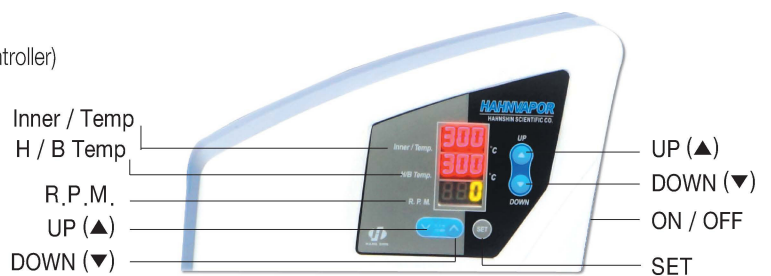

## Rotary Evaporator HS-2005V-N(CE)

- Dimension(W×D×H) : 620×410×870mm
- Power source : AC 220V 50/60Hz 2,5A
- Weight : 19,5kg
- Distinguished Features
  - 6 different types of flasks are attachable (from 50ml to 3000ml)
  - Digital speed control
  - Digital R.P.M Display / Speed control range : 20~280 R.P.M
  - Vertical type condenser
  - Digital interior temperature measure and display  
(It catches the temperature changes caused by the interior pressure drops)
  - Motorized UP- DOWN control switch
  - Easy to utilize standard distillation solution

### Included Water bath HS-3001(PTFE coating)

- Heater : 1000W / Bath Material : SUS304 / Weight : 2,8kg
- Bath Dimension( $\phi$ ×H)mm : 245×120(Capacity:4,3ℓ)
- Required Power Source : AC 220V 50/60Hz 3,5A
- Distinguished Features
  - If the amount of water goes down under the certain threshold in the heating bath, the system automatically turns off its power for the safety purpose
  - Temp.Control range : Amb.~180℃
  - Temp.Setting/Display : Digital control(controlled by the main controller)
- ※ Double jacketed bath body (Safe to touch)

Utility model & Design patent registered

